




IEC FABCHEM LIMITED
 861A, 'J' Block, 15th Street, 13th Main Road,
 Anna Nagar, Chennai – 600 040, Tamil Nadu.
Phone: 044- 26160854, 26160354
Fax: 044-26160458
Email: iecfc1@eth.net
Website: www.iecfabchem.in



MOULDED ACRYLIC FLOWMETER (FOR AIR)

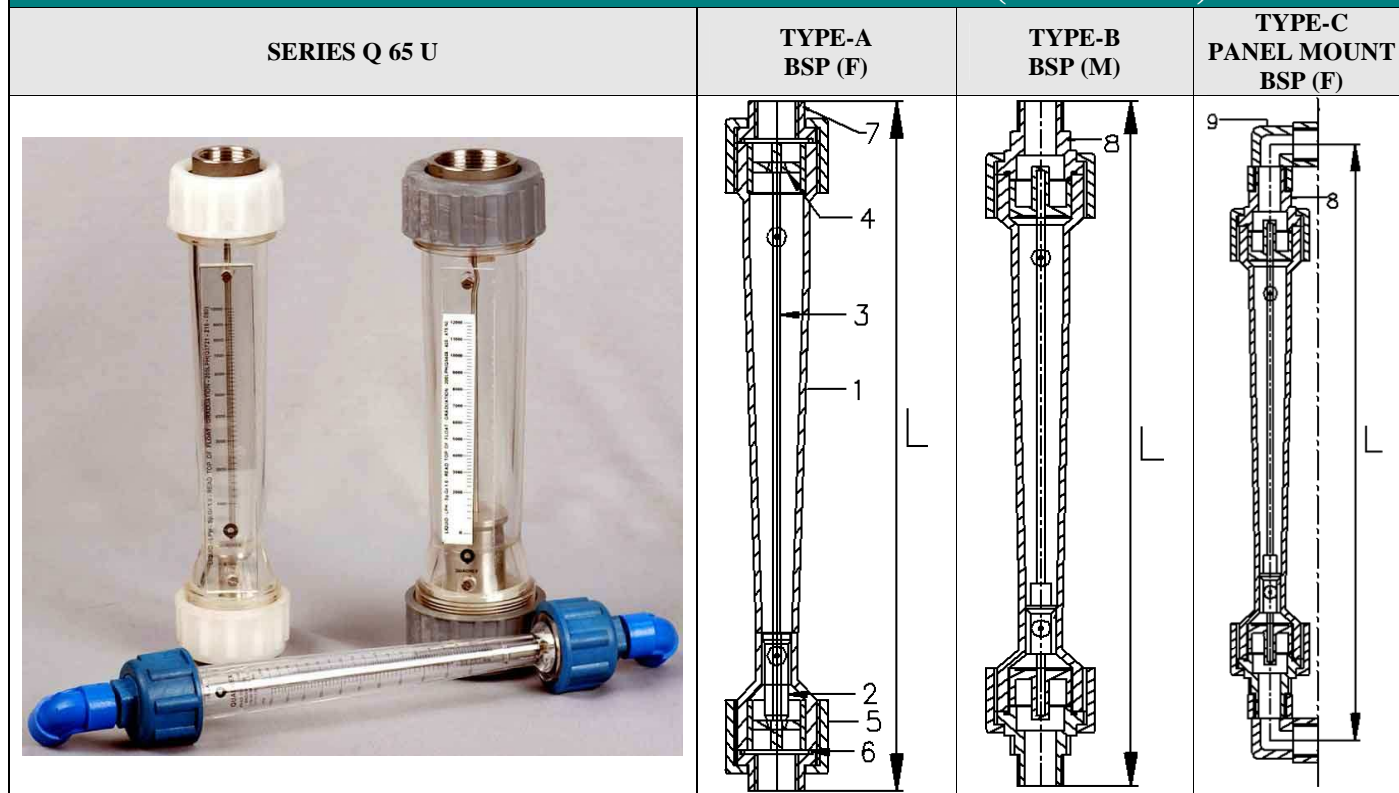

KEY	PART	MATERIAL
1.	BODY	MOULDED ACRYLIC
2.	FLOAT	SS316
3.	GUIDE	SS316
4.	STAY	POLYPROPYLENE
5.	UNION	ABS
6.	O-RING	NITRILE
7.	END CONNECTOR-Type - A	ASTM A-351-91A GR CF8M(CAST SS 316)
8.	END CONNECTOR-Type - B	ABS UPTO 90m ³ /hr (22614) OTHER PVC
9.	ELBOW	PVC
ACCURACY		±2%FSD
HYDROSTATIC TEST PRESSURE		1.5 TIMES OPERATING PRESSURE@ AMBIENT TEMP.

FLOW METER	AIR CAPACITY	TYPE A				TYPE B				TYPE C			
		SIZE	(L)	Kg/cm ² *		SIZE	(L)	Kg/cm ² *		SIZE	(L)	Kg/cm ² *	
172113A PVC FLOAT	7 m ³ /hr	15 NB	320	6	15 NB	365	4		15 NB	392	4		
	120 LPM												
172113 B PTFE FLOAT	12 m ³ /hr	15 NB	320	6	15 NB	365	4		15 NB	392	4		
	200 LPM												
172113C SS 316 FLOAT	27 m ³ /hr	15 NB	320	6	15 NB	365	4		15 NB	392	4		
	450 LPM												
132614	45 m ³ /hr	20 NB	320	6	20 NB	365	4		20 NB	400	4		
	750 LPM												
222614	90 m ³ /hr	20 NB	320	6	20 NB	365	4		20 NB	400	4		
	1500 LPM												
483721	220 m ³ /hr	25 NB	330	6	Minimum order Quantity 50#								
	3750 LPM												
XX4125	330 m ³ /hr	40 NB	330	6									
5500 LPM													