


MOULDED ACRYLIC FLOWMETER (FOR WATER)

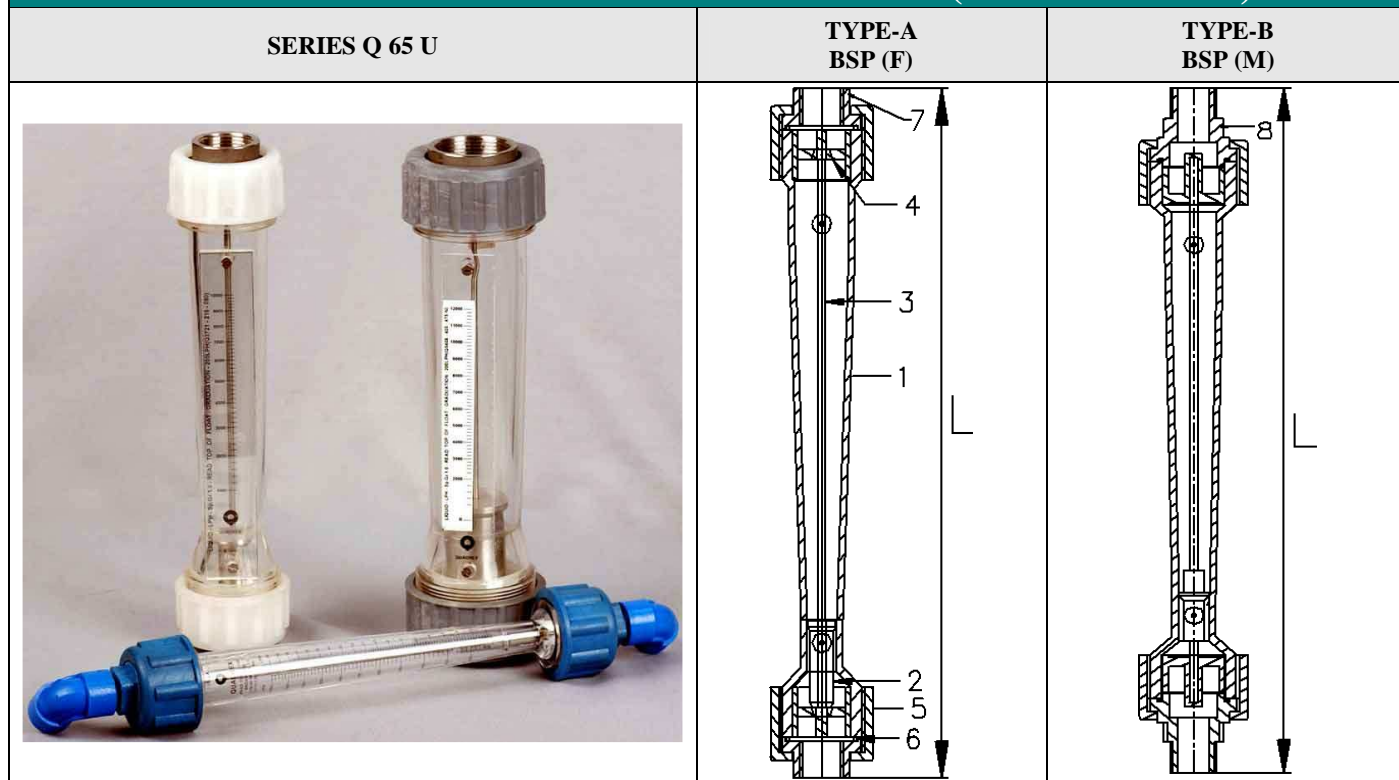

KEY		PART				MATERIAL			
1.		BODY				MOULDED ACRYLIC			
2.		FLOAT				SS316			
3.		GUIDE				SS316			
4.		STAY				POLYPROPYLENE			
5.		UNION				ABS			
6.		O-RING				NITRILE			
7.		END CONNECTOR- Type A				ASTM A-351-91A GR CF8M(CAST SS 316)			
8.		END CONNECTOR- Type B				ABS UPTO 3000 LPH (22614) OTHERS PVC			
9.		ELBOW				PVC			
		ACCURACY				±2%FSD			
		HYDROSTATIC TEST PRESSURE				1.5 TIMES OPERATING PRESSURE @ AMBIENT TEMP.			
FLOW METER	WATER CAPACITY	TYPE A				TYPE B			
		SIZE	(L)	Kg/cm ² *		SIZE	(L)	Kg/cm ² *	
172113	1200 LPH	15 NB	320	12		15 NB	365	10	
	20 LPM								
132614	2400 LPH	15 NB	320	12		15 NB	365	10	
	40 LPM								
222614	3000 LPH	20 NB	320	12		20 NB	365	10	
	50 LPM								
483721	6000 LPH	25 NB	330	12		25 NB	Minimum order Quantity 50#		
	100 LPM								
663721	9000 LPH	40 NB	330	12		32 NB			
	150 LPM								
XX4125	12000 LPH	40 NB	330	12		32 NB			
	200 LPM								